



SLC ADAPT

Modular On-line double conversion UPS 10-900 kVA

SLC ADAPT: Flexibility, availability and reliability in superior electrical protection

Salicru's **SLC ADAPT** series consists of modular On-line double conversion uninterruptible power supply (UPS) solutions with DSP control and three-level IGBT inverter technology.

Flexibility: It enables solutions to be configured from 10 kVA to 900 kVA, thanks to the wide range of modules available (10, 15, 20, 25 and 30 kVA), different configurable systems (3, 6 or 10 modules) and the parallel/redundant option of up to three 300 kVA systems. It also provides increased protection as needs grow - pay as you grow - thereby improving total cost of ownership (TCO).

Availability: Its hot-swap modules can be added or replaced during operation, thereby improving mean time to repair (MTTR) and reducing maintenance costs. In addition, the system's remote management, which can be integrated into any platform, also facilitates operation. And the extensive back-up options available, along with intelligent battery charging, ensure continuous operation of the protected critical loads.

Reliability: Its DSP control, based on three-level PWM technology, improves response effectiveness and, along with shared load redundancy, significantly extends the mean time between failures (MTBF). Moreover, both the control display and the bypass module can be replaced without affecting the operation of the device.

Performances

- On-line double conversion technology with modular architecture.
- 10, 15, 20, 25 and 30 kVA modules with DSP control and three-level PWM technology.
- 3, 6 or 10-module systems (up to 300 kVA per system).
- Possibility of parallel/redundant operation up to 900 kVA.
- Hot-pluggable and swappable plug & play modules.
- Input power factor >0.99.
- Input current distortion (THDi) <3%.
- Three-phase input / output voltages. ⁽¹⁾
- Output power factor = 0.9.
- Control and management by means of LCD display, LEDs and keypad.
- Efficiency in On-line mode >95%.
- 99% performance in Eco-mode operation.
- RS-232, RS-485, relays and USB ⁽²⁾ communication channels.
- Smart slots for extended relays ⁽²⁾ and SNMP.
- Smart-efficiency mode to optimize system performance. ⁽²⁾
- Improved return on investment (ROI).
- Compact design to save space in server rooms.
- SLC Greenergy solution.

⁽¹⁾ Possibility of single-phase input/output up to 20 kVA. And three-phase input and single-phase output up to 40 kVA.
⁽²⁾ Only in systems with 25 and 30 kVA modules.




SLC ADAPT

Applications: Redundant protection for critical applications

Data centres with all capacities, IT infrastructures, modular and virtualised data centres and applications for critical processes are some of the services that require high-level electrical protection to ensure reliable, continuous and high-quality operation, such as that provided by Salicru's **SLC ADAPT** series systems.



Modularity

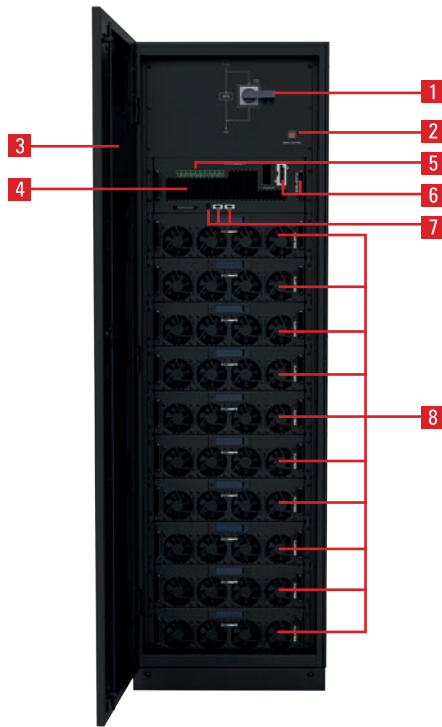

1. Manual bypass.
2. Battery start-up.
3. LCD display.
4. Bypass module.
5. Dry contacts.
6. Extended relays and SNMP slot.
7. RS-232, RS-485 and USB interfaces.
8. Power modules.

Display



Display consisting of operation keys, status LEDs and touch screen detailing all functions, measurements and alarms.

Options

- Extended relays ⁽¹⁾ and SNMP adapter.
- Extended back-up times.
- Dust filter.
- Kit for parallel systems.
- Frequency converter operation.

(1) Only for 25 and 30 kVA module systems.

Technical support and service

- Pre-sales and after-sales advice.
- Start-up. ⁽¹⁾
- Technical support by telephone.
- Preventive/corrective services.
- Maintenance contracts. ⁽¹⁾
- Training courses.

(1) Ask for local conditions



@salicru_SA



www.linkedin.com/company/salicru

SLC ADAPT



Modular On-line double conversion UPS 10-900 kVA

TECHNICAL SPECIFICATIONS

MODEL		SLC ADAPT	
Module power		10 / 15 / 20 kVA	25 / 30 kVA
TECHNOLOGY		On-line double conversion, three-level PWM, DSP control	
INPUT	Nominal voltage	3 x 380 / 3 x 400 / 3 x 415 V (3Ph + N)	
	Voltage range	-40% +25% ⁽¹⁾	-43% +20% ⁽¹⁾
	Frequency	50 / 60 Hz	
	Total harmonic distortion (THDi)	≤3%	
	Power factor	>0.99	
OUTPUT	Nominal voltage	3 x 380 / 3 x 400 / 3 x 415 V (3Ph + N)	
	Accuracy	±1% (static mode) / ±1.5% (dynamic mode)	
	Frequency	50/60 Hz ±2 Hz ⁽²⁾	50/60 Hz ±3 Hz ⁽²⁾
	Total harmonic distortion (THDv)	≤1.5% for linear loads / ≤5% for non linear loads (EN-IEC 62040-3)	<1% for linear loads <6% for non linear loads (EN-IEC 62040-3)
	Power factor	0.9	
	Crest factor	3:1	
	Total efficiency in On-line mode	>95%	
	Total efficiency in battery mode	>95%	
	Total efficiency in Eco mode	99%	
	Admissible overload	125% for 10 mins / 150% for 1 min	
	STATIC BYPASS	Type	Static thyristor
Voltage		3 x 380 / 3 x 400 / 3 x 415 V (3FPh + N)	
Voltage range		±20% (adjustable)	-20% +15% (adjustable)
MANUAL BYPASS	Type	Uninterrupted	
BATTERIES	Type	Lead-acid, sealed, maintenance-free	
	Voltage load regulation	Batt-watch	
	Precision float charger	±1%	
	Charger maximum power	20% of total system power	
COMMUNICATION	Display	Touchscreen, 5.7", LEDs and keypad	Touchscreen, 10.4", LEDs and keypad
	Ports	RS-232, RS-485 and relays	RS-232, RS-485, relays and USB
	Free slots	1 x SNMP	1 x SNMP / 1 x extended relays
GENERAL	Operating temperature	0° C ÷ +40° C	
	Relative humidity	Up to 95%, non-condensing	
	Operating altitude	2,400 masl ⁽³⁾	
	Acoustic noise at 1 metre	<55 dB(A)	<65 dB(A)
SYSTEMS	Maximum no. modules per system	3, 6 or 10	10
	Maximum power per system (kVA)	60, 120, 200	300
	Maximum no. parallel systems	2	3
	Maximum power parallel systems (kVA)	120, 240, 400	900
STANDARDS	Safety	EN-IEC 62040-1	
	Electromagnetic compatibility (EMC)	EN-IEC 62040-2	
	Operation	VFI-SS-111 as per EN-IEC 62040-3	
	Quality and environmental management	ISO 9001 and ISO 14001	

(1) Depending on load percentage.

(2) Selectable range.

(3) 1% derating power every 100 m over 1000 m.

Data may change without previous notice.

RANGE

MODULES	POWER (kVA / kW)	DIMENSIONS (D x W x H mm.)	WEIGHT (Kg)
SLC ADAPT 10	10 / 9	590 x 440 x 134	20
SLC ADAPT 15	15 / 13.5	590 x 440 x 134	21
SLC ADAPT 20	20 / 18	590 x 440 x 134	22
SLC ADAPT 25	25 / 22.5	790 x 460 x 134	34
SLC ADAPT 30	30 / 27	790 x 460 x 134	34

SYSTEMS	NO. MODULES (#)	MOD. POWER (kVA / kW)	MAX. POWER (kVA / kW)	DIMENSIONS ⁽¹⁾ (D x W x H mm.)	WEIGHT (Kg)
SLC-#/10-ADAPT 30	1 to 3	10 / 9	30 / 27	900 x 600 x 1000	120 ÷ 180
SLC-#/15-ADAPT 45	1 to 3	15 / 13.5	45 / 40.5	900 x 600 x 1000	120 ÷ 183
SLC-#/20-ADAPT 60	1 to 3	20 / 18	60 / 54	900 x 600 x 1000	120 ÷ 186
SLC-#/10-ADAPT 60	1 to 6	10 / 9	60 / 54	900 x 600 x 1600	187 ÷ 270
SLC-#/15-ADAPT 90	1 to 6	15 / 13.5	90 / 81	900 x 600 x 1600	187 ÷ 276
SLC-#/20-ADAPT 120	1 to 6	20 / 18	120 / 108	900 x 600 x 1600	187 ÷ 282
SLC-#/10-ADAPT 100	1 to 10	10 / 9	100 / 90	900 x 600 x 2000	214 ÷ 380
SLC-#/15-ADAPT 150	1 to 10	15 / 13.5	150 / 135	900 x 600 x 2000	214 ÷ 390
SLC-#/20-ADAPT 200	1 to 10	20 / 18	200 / 180	900 x 600 x 2000	214 ÷ 400
SLC-#/25-ADAPT 250	1 to 10	25 / 22.5	250 / 225	1100 x 600 x 2000	200 ÷ 560
SLC-#/30-ADAPT 300	1 to 10	30 / 27	300 / 270	1100 x 600 x 2000	200 ÷ 560

(1) Batteries located in additional cabinets.

Nomenclature, dimensions and weights for devices with input voltage 3 x 400 V, output voltage 3 x 400 V.

+34 93 848 24 00 WWW.SALICRU.COM

AVDA. DE LA SERRA 100 · 08460 PALAUTORDERA (SPAIN) · FAX +34 93 848 11 51 · salicru@salicru.com

SALICRU